

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number  
**WO 2005/053069 A1**

(51) International Patent Classification<sup>7</sup>: HOIM 8/02, 8/24

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,  
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW

(21) International Application Number:

PCT/IB2004/003843

(22) International Filing Date:

24 November 2004 (24.11.2004)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2003-394274 25 November 2003 (25.11.2003) JP

Published:

— with international search report

(48) Date of publication of this corrected version:


27 April 2006

(15) Information about Correction:

see PCT Gazette No. 17/2006 of 27 April 2006

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FUEL CELL SEPARATOR, MANUFACTURING METHOD OF SAME, AND FUEL CELL AND VEHICLE USING THE SEPARATOR

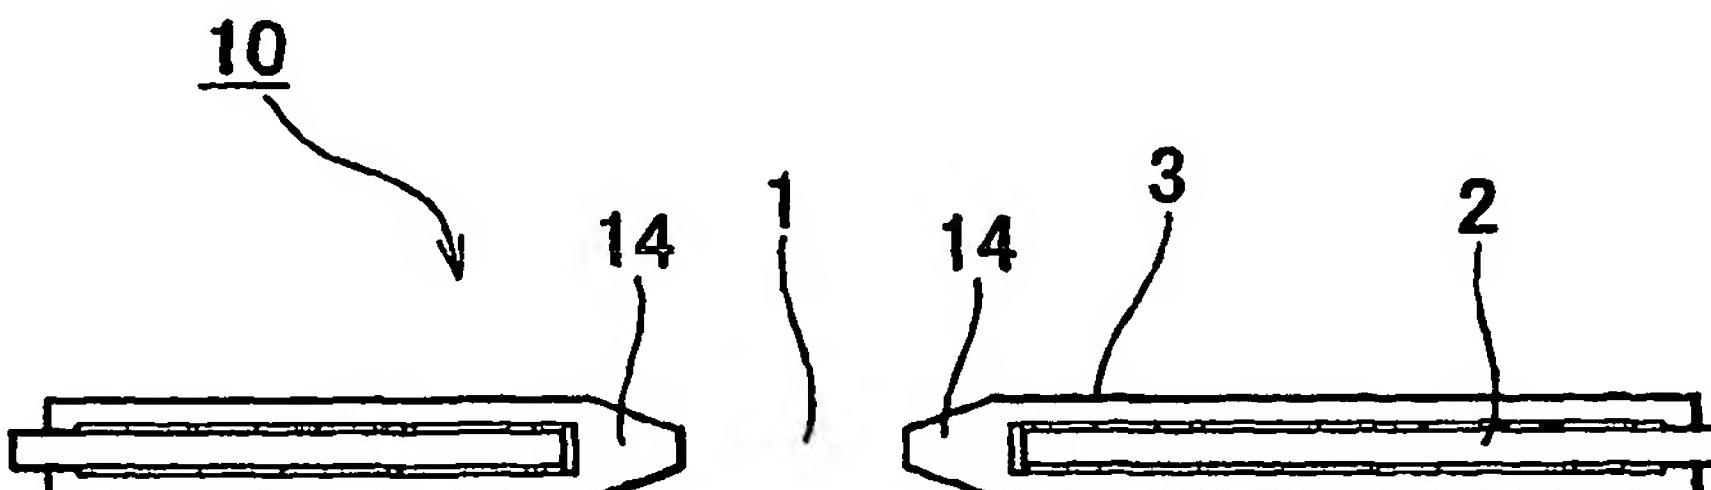

CROSS-SECTION A-A

(57) Abstract: A fuel cell separator is provided with a separator substrate (2) made of metal which has at least one open portion (1) through which a fluid can pass provided in a predetermined position, and a film coating member (3) that coats a predetermined area including the open portion (1) of the separator substrate (2). A portion of the film coating member (3) that corresponds to at least a peripheral edge portion (14) of the open portion (1) is adhesion treated.

WO 2005/053069 A1